



# KR-600/1/2


Cititor cartele de proximitate



## Caracteristici:

- Design elegant
  - Control Acces de proximitate
  - Epoxid solid turnat
  - Protectie la inversarea polaritatii
  - IP65
- Cititor RFID 125KHz integrat
  - Timp citire <300ms
  - Indicator LED pentru acces permis/refuzat
  - Compatibil cu toate controlere de acces cu interfete de intrare Wiegand

# Configuratie tipica in cadrul unui sistem de control acces

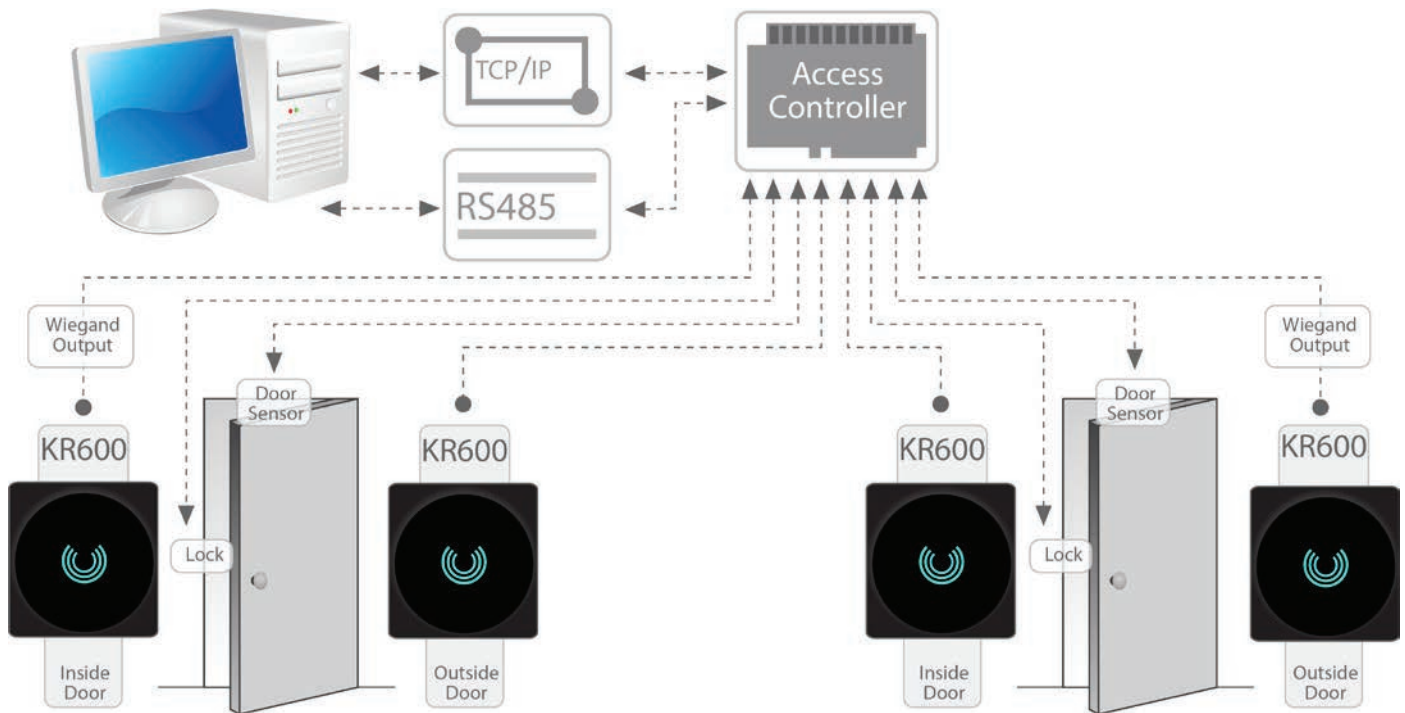

KR600

KR601

KR602

Rosu - 12V  
 Negru - GND  
 Verde - D0 (Wiegand)  
 Alb - D1 (Wiegand)  
 Gri - Led  
 Mov - Buzzer



## Specificatii

Protectie la intemperii:	IP65
Carduri RFID suportate:	Cartele/tag-uri 125KHz, EM4100, EM4305
Distanța de citire:	Pana la 10 cm
Culoare:	Gri
Interfata Wiegand:	lesire 26biti
Compatibilitate controler acces:	Toate controlerile cu interfata de intrare Wiegand
Notificare:	LED & Buzzer
Alimentare:	6-14Vcc 70mA
Temperatura de operare:	-20 °C ~ 70 °C
Umiditate:	20%-80%
Dimensiuni:	KR600- 75 X 116 X 16 mm KR601/2- 86 X 86 X 16 mm